LINE 'EM UP.

The Vermeer BW5500 inline bale wrapper puts large-volume hay operations and custom operators in full control. Get faster wrapping times with three film pre-stretchers – compared to machines with only two. Control wrap settings to minimize plastic use and reduce spoilage with a user-friendly digital controller. And track operational data on a convenient-to-read LCD screen. So go ahead, line 'em up.

Vermeer

LINE 'EM UP.

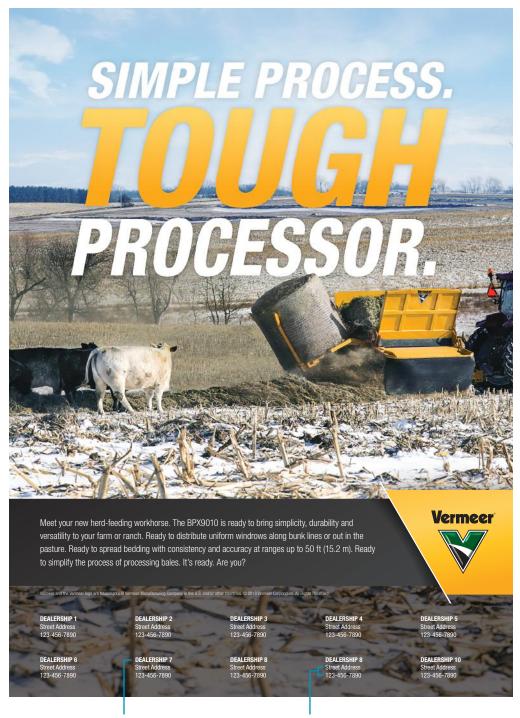The Vermeer BW5500 inline bale wrapper puts large-volume hay operations and custom operators in full control. Get faster wrapping times with three film pre-stretchers – compared to machines with only two. Control wrap settings to minimize plastic use and reduce spoilage with a user-friendly digital controller. And track operational data on a convenient-to-read LCD screen. So go ahead, line 'em up.

Vermeer Newsroom Vertical Multiple Dealer List Ad Fixed Depth
(Example shown is 7.5" wide x 10.25" tall at 70% scale)

SIMPLE PROCESS.
TOUGH
PROCESSOR.

Meet your new herd-feeding workhorse. The BPX9010 is ready to bring simplicity, durability and versatility to your farm or ranch. Ready to distribute uniform windrows along bunk lines or out in the pasture. Ready to spread bedding with consistency and accuracy at ranges up to 50 ft (15.2 m). Ready to simplify the process of processing bales. It's ready. Are you?

Vermeer

DEALERSHIP 1
Street Address
123-456-7890

DEALERSHIP 2
Street Address
123-456-7890

DEALERSHIP 3
Street Address
123-456-7890

DEALERSHIP 4
Street Address
123-456-7890

DEALERSHIP 5
Street Address
123-456-7890

DEALERSHIP 6
Street Address
123-456-7890

DEALERSHIP 7
Street Address
123-456-7890

DEALERSHIP 8
Street Address
123-456-7890

DEALERSHIP 8
Street Address
123-456-7890

DEALERSHIP 10
Street Address
123-456-7890

Location listing title to be
reversed white in all caps
set in Helvetica Neue LT Std
77 Bold Condensed

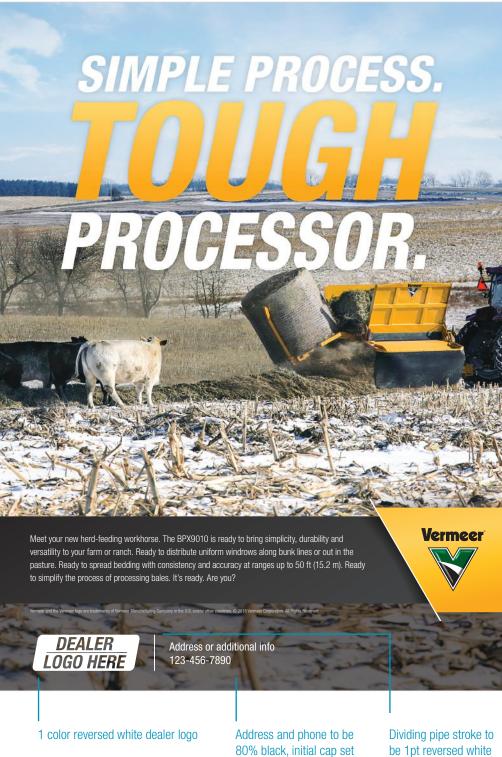Minimum font size should
not be smaller than 5.5pt

Address and phone to be
reversed white, initial cap
set in Helvetica Neue LT Std
57 Condensed

Minimum font size should
not be smaller than 5.5pt

SIMPLE PROCESS.
TOUGH
PROCESSOR.

Meet your new herd-feeding workhorse. The BPX9010 is ready to bring simplicity, durability and versatility to your farm or ranch. Ready to distribute uniform windrows along bunk lines or out in the pasture. Ready to spread bedding with consistency and accuracy at ranges up to 50 ft (15.2 m). Ready to simplify the process of processing bales. It's ready. Are you?

Vermeer

DEALERSHIP 1
Street Address
123-456-7890

DEALERSHIP 2
Street Address
123-456-7890

DEALERSHIP 3
Street Address
123-456-7890

DEALERSHIP 4
Street Address
123-456-7890

DEALERSHIP 5
Street Address
123-456-7890

DEALERSHIP 6
Street Address
123-456-7890

DEALERSHIP 7
Street Address
123-456-7890

DEALERSHIP 8
Street Address
123-456-7890

DEALERSHIP 8
Street Address
123-456-7890

DEALERSHIP 10
Street Address
123-456-7890

Location listing title to be 80% black in all caps set in Helvetica Neue LT Std 77 Bold Condensed

Minimum font size should not be smaller than 5.5pt

Address and phone to be 80% black, initial cap set in Helvetica Neue LT Std 57 Condensed

Minimum font size should not be smaller than 5.5pt

Vermeer Newsroom Vertical Single Dealer Listing Ad
(Example shown is 7.5" wide x 10.25" tall at 70% scale)

SIMPLE PROCESS.
TOUGH
PROCESSOR.

Meet your new herd-feeding workhorse. The BPX9010 is ready to bring simplicity, durability and versatility to your farm or ranch. Ready to distribute uniform windrows along bunk lines or out in the pasture. Ready to spread bedding with consistency and accuracy at ranges up to 50 ft (15.2 m). Ready to simplify the process of processing bales. It's ready. Are you?

Vermeer

DEALER
LOGO HERE

Address or additional info
123-456-7890

1 color reversed white dealer logo

If there is no logo, typeset dealer name to be reversed white set in Helvetica Neue LT Std 77 Bold Condensed

Font size should not be smaller than 15pt

Address and phone to be 80% black, initial cap set in Helvetica Neue LT Std 57 Condensed

Minimum font size should not be smaller than 12pt

Dividing pipe stroke to be 1pt reversed white

Length dependent on logo size or typeset dealer name