

D130S HORIZONTAL DIRECTIONAL DRILL



POWERFUL **DRILLING SOLUTION** FOR TIGHT, NARROW **JOB SITES**

Equipped with 578,200 kN (130,000 lb) of thrust and pullback, the D130S is a sturdy machine made in Tianjin, China, with high-quality parts and components that Vermeer is known for. This new generation of D130S also has several enhanced features that allow for high functionality, productivity and ease of use.

To facilitate greater connectivity and to support the development of both rural and urban areas, the D130S helps fill these various new infrastructure needs. These include telecommunications (fiberoptics), water, electricity, gas and oil pipeline installations across varying ground conditions and locations. Take on challenging, large-diameter drilling projects without worrying about space restrictions. In addition, the machine also keeps surface disruption to a minimum, making it ideal for projects in densely populated, residential areas.









Plus+1 control system

For precision and reliability, the control system in the D130S has been upgraded to Plus+1. This drill also includes the AutoSteer system, which automates certain drill head motions, helping you to set and adjust rotation duration and direction while maintaining a preset thrust pressure to get through hard ground conditions. This enables drilling consistency. To top it off, the updated console design helps provide a seamless, user-friendly bore path adjustment experience for the operator.



Increased rod-loading capacity

The operator-controlled rod loader helps reduce labor involved with manually loading and unloading drill rod. The stackable rod box increases the rod loading capacity of the D130S, improving overall drilling efficiency by enabling a full set of rods to be loaded into the machine with a touch of a button.



Compact footprint and ease of transport

Machine maneuverability is key to navigating tight, narrow jobsites. With a length of 33.5 ft (10.2 m), and width of 8.2 ft (2.5 m), the self-contained, compact design of the D130S allows for convenient transportation, navigability and minimized setup time.



High-powered rotational torque and thrust

Consisting of 130,000 lb (578,200 kN) of thrust and pullback and 15,000 ft-lb (20,337 Nm) of rotational torque, the D130S is able to penetrate through different and difficult terrains efficiently and effectively.



Optional crane

Lesser support equipment is required onsite with the choice of a telescoping crane, thus freeing up more working space. This option can help maximize jobsite productivity by aiding rod box load/unload and maneuvering large tooling on rig side.




Optional rotary stakedown system


Cut down on setup time and the number of materials needed with our optional rotary auger-style stakedown.


VERMEER PARTS AND SUPPORT

You can get sound service from Vermeer dealer service technicians when and where you need it most. From our application insight to our confidence at the counter, Vermeer will work to answer your requests with expert care and promptness. We know your machines better than anyone, and we know dependability matters when your machines need service. That's why we take pride in resolving issues the first time, helping you maximize your productivity.

When it comes to parts, your Vermeer dealer will work to get what you need in the least amount of time — because we understand that when you need a part, you need it now. Vermeer dealerships focus on serving your needs quickly, consistently and efficiently. That's the Vermeer way.



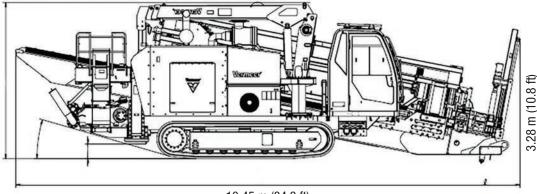

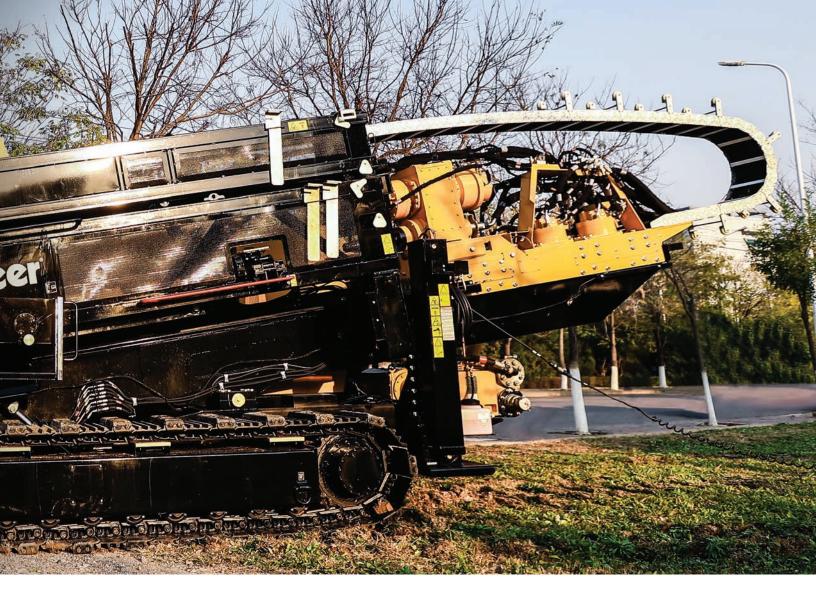

SPECIFICATION	D130S HORIZONTAL DIRECTIONAL DRILL
GENERAL DIMENSIONS AND WEIGHTS	
Length (minimum transport)	10.45 m (34.3 ft)
Width (minimum transport)	2.5 m (8.2 ft)
Height (minimum transport)	3.28 m (10.8 ft)
Height (minimum transport with stakedown)	3.33 m (10.9 ft)
Weight (minimum transport)	19,196 kg (46,600 lb)
Weight (minimum transport with 16 rods)	22498.2 kg (49,600 lb)
PERFORMANCE	
Maximum pullback	59 ton (130,100 lb)
Maximum thrust	59 ton (130,100 lb)
Maximum carriage speed at maximum engine rpm	25 m/min (82 ft/min)
Minimum carriage speed at maximum engine rpm	10 m /min (33 ft/min)
Maximum spindle torque (high at maximum engine rpm)	10,168 Nm (7,500 ft-lb)
Maximum spindle torque (medium at maximum engine rpm)	13,550 Nm (10,000 ft-lb)
Maximum spindle torque (low at maximum engine rpm)	20,337 Nm (15,000 ft-lb)
Maximum spindle speed at maximum engine rpm	95 rpm
Medium spindle speed at maximum engine rpm	65 rpm
Low spindle speed at maximum engine rpm	45 rpm
Maximum ground drive speed	4 km/h (2.48 mph)

SPECIFICATION	D130S HORIZONTAL DIRECTIONAL DRILL
ENGINE (TIER 3)	
Brand	DONG FENG CUMMINS
Model	QSB6.7-C260
Power	194 kW (260 hp)
Rated rpm	2,200 rpm
DRILL PIPE	
Туре	VERMEER ROD
Rod diameter	89 mm (3.5 in)
Rod length	6 m (20 ft)
Weight	155 kg (342 lb)
Maximum entry angle	20°
MUD PUMP (USA, FMC)	
Maximum pressure	83 bar (1,204 psi)
Maximum flow	757 L/min (200 gpm)
TANK CAPACITY	
Hydraulic tank	410 L (108 gal)
Fuel tank	310 L (82 gal)

Vermeer Corporation

1210 Vermeer Road East Pella, Iowa 50219 800-370-3659

Vermeer Latin America

Rua Francisco Juliato, 79 Vale Verde — 13279-000 Valinhos, SP — Brazil +55(19)3517-9400

Vermeer EMEA

(Europe, Middle East, Africa and CIS) Nijverheidsstraat 20 4458 AV 's-Heer Arendskerke The Netherlands +31(0)113-272700

Vermeer Asia Pacific

545 Orchard Road #12-06 Singapore 238882 +65-6516-9560

Vermeer Tianjin Manufacturing Co., Ltd. drills shown are available only through select Vermeer dealers for sale into less emission-regulated countries.

Vermeer Tianjin Manufacturing Co., Ltd. reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation.

Equipment shown is for illustrative purposes only and may display optional accessories or components specific to their global region.

Please contact your local Vermeer dealer for more information on machine specifications.

Vermeer and the Vermeer logo are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. Dongfeng Cummins is a trademark of Dongfeng Cummins Engine Co., Ltd.

© 2021 Vermeer Tianjin Manufacturing Co., Ltd. All Rights Reserved.

PN 296431656 12/21



D130S HORIZONTAL DIRECTIONAL DRILL