

BALE PROCESSORS



BPX9010, CPX9000



BPX9010 BALE PROCESSOR

The BPX9010 bale processor combines simplicity, durability and versatility. Distribute a consistent, uniform windrow of crop along the bunk line or out in the pasture. Spread bedding with consistency at ranges of up to 50 ft (15.2 m). Designed to meet the needs of those who want productivity and ease of operation, this all-around processor is ready to perform in a variety of applications.

1 The rotor cleaner attachment can be moved on the cut control bars to help reduce excessive net and twine on the rotor. Operators can access the rotor from the left side of the machine by simply opening the door.

2 Process both round and large square bales evenly and consistently with the optional powered sidewall kit and the optional straight fork kit.

3 The slat-and-chain bale rotation design feeds bales consistently into the rotor — reducing the need to reverse rotation. Heavy-duty sprockets and chains allow misshaped bales to be processed smoothly. Split shafts let operators perform maintenance without removing the entire bed.

4 An offset rotor pulls material through the machine for consistent feeding and helps prevent uncontrolled fall-through when slowing down the machine.



5 The toolless cut control bar design allows dual adjustments to be made for increased aggression and is accessible from outside the machine. Ten different settings allow operators to be in control of processing speed and material size.

6 A vertical bale lift system helps make it quick and convenient to load bales and can reduce stress on the machine.





CPX9000 BALE PROCESSOR

The CPX9000 bale processor gives operators the ability to process and distribute forage materials smoothly, consistently and accurately at long distances — up to 100 ft (30 m) — making it ideal for multiple applications.

1 Direct feed from a dual-fan blower system provides consistent material flow from the tub to the spout — which helps reduce the chance of material plugging, a common issue with non-direct feed systems.


2 Replaceable, abrasion-resistant steel liners and fan paddles provide durability, especially needed when processing contamination-filled material like cornstalks. Optional high-wear liners are also available.



3 Automatic bale feed system helps optimize productivity. It provides smooth material feeding through automatic forward or reverse to help reduce operator steps and tractor power requirement.

4 Hydraulic controls provide operators the ability to choose how the spout is angled and how the crop is distributed. Operators can change the angle of the deflector up to a 90-degree angle, making it ideal for curbside applications.

5 Optional hydraulic cut control bar kit lets operators make cut length adjustments from the tractor cab. Scraper plates on cut control bars can be adjusted to reduce netwrap or twine buildup in the processed forage.

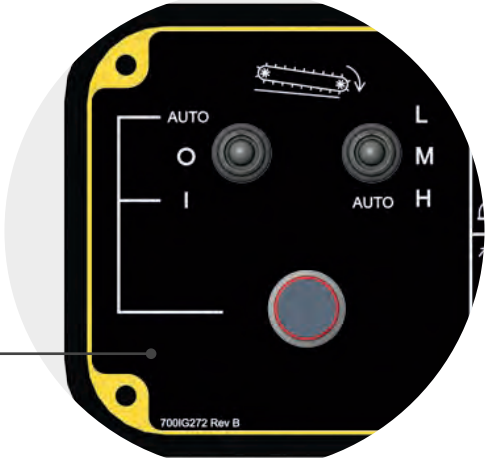

SPECIFICATION	BPX9010 BALE PROCESSOR	CPX9000 BALE PROCESSOR
DIMENSIONS AND WEIGHTS		
Length	15.8 ft (4.8 m)	15.6 ft (4.8 m)
Transport width	8.2 ft (2.5 m)	8.4 ft (2.6 m)
Working width	11.2 ft (3.4 m)	19.8 ft (6 m)
Height	8.5 ft (2.6 m)	10 ft (3 m)
Weight	5,240 lb (2,380 kg)	7,460 lb (3,380 kg)
Drawbar weight	1,480 lb (670 kg)	2,500 lb (1,100 kg)
Axle adjustment	12 in (30 cm) each axle	12 in (30 cm) each axle
Tires	Standard 14L x 16.1FL; Optional 16.5L-16.1SL 6 SofTrac II flotation tire	16L–16.1SL 6 SofTrac II flotation tire
TRACTOR REQUIREMENTS		
PTO horsepower minimum	85 hp (63 kW)	110 hp (82 kW)*
PTO horsepower recommended	100 hp (75 kW)	150 hp (110 kW)
PTO horsepower maximum	210 hp (160 kW)	210 hp (160 kW)
PTO speed	1,000 rpm	1,000 rpm
Hydraulic type	3 double-acting (2 double-acting with optional kit)	2 double-acting
Hydraulic pressure	2,000 psi (140 bar)	2,000 psi (140 bar)
Hydraulic flow rate	8 gpm (30 L/min)	8 gpm (30 L/min)
TUB		
Bale rotation	3 roller chains with bolt-on cross slat	3 roller chains with bolt-on cross slat
Bale size capacity	(2) bales, 6 ft x 5 ft (1.8 m x 1.5 m)	(2) bales, 6 ft x 5 ft (1.8 m x 1.5 m)
Bale weight capacity	2,500 lb (1,100 kg)	2,500 lb (1,100 kg)
PROCESSING SYSTEM		
Cut control bar adjustment	Hand lever with 5 settings, plus an additional high/low setting	Hand lever with 5 settings
Cut control bar quantity	7	7
Flail description	7/16 in (1.1 cm) x 5-9/16 in (14.1 cm) tempered spring	7/16 in (1.1 cm) x 5-9/16 in (14.1 cm) tempered spring
Flail drum diameter	26.8 in (68.1 cm)	26.8 in (68.1 cm)
Flail drum length	78 in (200 cm)	78 in (200 cm)
Flail drum speed	1,000 rpm	1,000 rpm
Flail quantity	30	30

*Minimum PTO horsepower with automatic bale feed. Without automatic bale feed, use recommended PTO horsepower.

SPECIFICATION	BPX9010 BALE PROCESSOR	CPX9000 BALE PROCESSOR
DISCHARGE SYSTEM		
Discharge direction	Right hand	Right and left hand, a 260° rotation
Blower	NA	(2) 38.6-in (98-cm) blower fans (1,500 rpm front and 1,000 rpm rear)
Fan speed — front	NA	1,500 rpm
Fan speed — rear	NA	1,000 rpm
Horizontal spread distance	Up to 50 ft (15.2 m)	Up to 100 ft (30 m)
FEATURES		
Safety chain	Optional	Optional
Torque protection — driveline	Shear bolt	2 shear hubs
Scale kit	Optional	NA
Material containment kit	Optional	Optional
Powered sidewall	Optional	Standard
Square bale fork kit	Optional	NA
Front discharge curtain	Optional	NA
Automatic bale feed system	NA	Standard
Camera kit	NA	Optional
High-wear resistance liner	NA	Optional





Follow us on social media.



Information noted in this document was gathered from a third party who was advised his/her experience might be featured in marketing materials. This document contains third-party observations, advice or experiences that do not necessarily reflect the opinions of Vermeer Corporation, its affiliates or its dealers. Individual results may vary based on care and operation of machine and crop and field conditions, which may adversely affect performance. Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components specific to their global region. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo, Atlas, Atlas Pro, Q3, Quick-Clip, Quick Change and the Black, White and Green bale wrap color scheme (Vermeer Net) are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. © 2026 Vermeer Corporation. All Rights Reserved.



Find your dealer.