


R9x12T RECLAIMER



IMPROVE PERFORMANCE. Depending on the drilling conditions, the operator can select either a linear or orbital shaker motion to improve recycling performance.

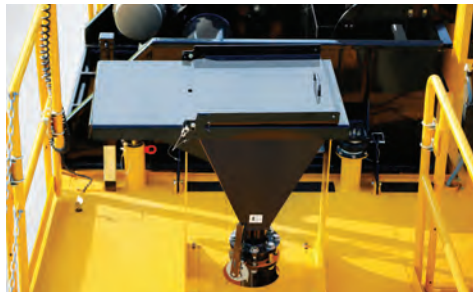

IN THE MIX. An integrated mixing hopper offers simultaneous mixing and recycling within a single system, helping to eliminate the need for an additional onsite drilling fluid mixing system.



LIGHT UP YOUR JOBSITE. Equipped with telescoping lights for around-the-clock operations.



FLUID PROTECTION. Inlet fluid is routed through mud boxes helping reduce premature wear to shaker decks/screens caused by larger material.



A CLEAR VIEW. Controls for the main system functions and optional mix hopper are located on a single working level. Design considerations centralize access to main controls to a single-level work area to reduce movement by crew members.



PROTECTION FROM THE ELEMENTS. An enclosure helps protect critical components, such as the generator set, fuel tank and electrical equipment from the elements. The enclosure features a service entry for accessibility and helps reduce noise.

R9x12T RECLAIMER

GENERAL WEIGHTS AND DIMENSIONS

Weight: 65,500 lb (29,710.3 kg)

Length: 51.8' (15.8 m)

Width: 8.5' (2.6 m)

Height: 13.4' (4.1 m)

FRAME

Type: Fifth-wheel trailer

Suspension: Triple axle with air-ride

Axles: 10-bolt, hub-piloted, ABS

Certifications: DOT lighting and braking

TANK CAPACITIES

Max capacity: 8560 gal (32,403.1 L)

Number of tanks: 3

Clean/Mix tank capacity: 3197 gal (12,102 L)

CLEANING SYSTEM

Shaker type: Linear or orbital

Number of shakers: 4 (2 motors/shakers)

Shaker bed area – each: 26 sq ft (2.4 sq m)

Number of screens per shaker: 3

Screen dimension: 25" x 49.3" (63.5 cm x 125.2 cm)

Cleaning capacity (first cut): 600 gpm (2271 L/min)

Desander capacity: 1500 gpm (5678.1 L/min)

Desander quantity/size: 3 - 10" (25.4 cm) cones

Desilter capacity: 1280 gpm (4542.5 L/min)

Desilter quantity/size: 16 - 5" (12.7 cm) cones

GENERATOR SET

Generator: 3 phase 250 kW (313 kVA)

FEATURES

Agitator system: 3 – 2 hp (1.5 kW) stainless steel bladed mixers

Ancillary electrical system: 120/240 VAC

Work lights: 3 – 42W 12V LED

NOTES:

Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo and Equipped to Do More are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. © 2015 Vermeer Corporation. All Rights Reserved. Printed in the U.S.A. Please recycle.

