


# BC1200XL BRUSH CHIPPER



**DUAL HORIZONTAL OFFSET FEED ROLLERS.** Improve performance by aggressively grabbing and feeding material to the drum. The offset helps the upper feed roller climb over big logs or material with lots of branches and forks.

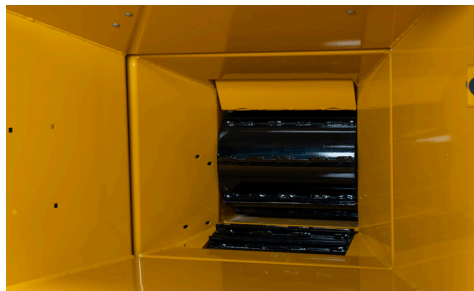

**EASILY LIFTS HEAVY MATERIAL.** An optional winch allows operators to move large logs effortlessly. The 150' (45.7 m) winch line can handle logs up to 2,000 lb (907.2 kg) and can be used to lift the log onto the feed table.



**ENGINE OPTIONS.** The BC1200XL offers either a 110-hp (82 kW) Deutz TCD 2.9 T4F diesel engine or a 115-hp (85.8 kW) Origin 4.3 gasoline engine - giving customers the flexibility to choose the power that's right for their operation.



**A CLUTCHLESS PTO SYSTEM.** Avoids premature wear to the belt-drive system by preventing high-speed engagement of the cutter drum. The throttle is integrated with the belt drive to help ensure the PTO can be engaged only while the engine is at low speed.

EXTENDED  
**3 YEAR  
3000 HOUR**  
COVERAGE

**EXTENDED COVERAGE.** The 3-year/ 3,000-hour extended limited coverage on drum housing, cutter drum, shaft and ring-fetter hubs offers you peace of mind, in addition to the 1-year/1,000-hour Vermeer equipment limited warranty.



**ECOIDLE™ ENGINE CONTROL SYSTEM.** When the Ecolidle function is selected by the operator, the engine speed automatically lowers to a preset rpm after 1 minute or 5 minutes of inactivity to help reduce fuel consumption when not chipping material. Due to this idling, noise is reduced.

# BC1200XL BRUSH CHIPPER

## GENERAL

Length: 168 in (426.7 cm)

Width: 79 in (200.7 cm)

Height: 103 in (261.6 cm)

## ENGINE OPTION ONE

Make/Model: Origin 4.3L

Horsepower: 115 hp (85.8 kW) @ 2600 rpm

Max torque: 231 ft-lb (313.2 Nm)

Fuel type: Gasoline

Number of cylinders: 6

Cooling medium: liquid

Weight (with winch): 5,980 lb (2,712.49 kg)

Weight: 5,680 lb (2,576.4 kg)

## ENGINE OPTION TWO

Make/Model: Deutz TCD2.9 T4F/STG V

Horsepower: 103 hp (77 kW) @ 2200 rpm

Max torque: 310 ft-lb (420 Nm) @ 1600 rpm

Fuel type: Diesel

Number of cylinders: 4

Cooling medium: liquid

Weight (with winch): 6,580 lb (2,985 kg)

Weight: 6,260 lb (2,840 kg)

## CUTTING SYSTEM

Drum dimensions: 20 in diameter x 20 in wide (50.8 cm x 50.8 cm)

Drum speed: 2,000 rpm

Knives: Two A8 chipper steel

Bedknife: Four usable edges

## FEED SYSTEM

Chipping capacity (max): 13.3 in (33.8 cm)

Infeed opening height: 32 in (81.3 cm)

Infeed opening width: 52 in (132.1 cm)

Feed roller orientation: Dual horizontal offset

Feed table height: 32 in (81.3 cm)

Feed speed (max): 110 fpm (33.5 m/min)

Feed roller dimensions (upper roller): 15 in diameter x 17 in wide (38.1 cm x 43.2 cm)

Feed roller dimensions (lower roller): 11.1 in diameter x 17 in wide (28.2 cm x 43.2 cm)

## CAPACITIES/ELECTRICAL

Fuel tank: 25 gal (94.6 L)

Hydraulic tank: 12 gal (45.4 L)

DEF tank: 2.6 gal (10 L)

System voltage: 12 V

Lights: LED brake, turn, tail, license, side indicators

## CHASSIS/BRAKES

Frame: 7 in x .25 in (17.8 cm x .6 cm) Z-channel

Tires: ST235/80/R16 Load Range E

Axle/Suspension: 7,000 lb (3,175.2 kg) rubber torsion

Electrical brakes with breakaway switch

## OPTIONS

Extended coverage

Special paint

Planned maintenance

Vermeer Confidence Plus® asset protection program

## NOTES:

---

---

---

---

---

---

---

---

---

---

Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components specific to their global region. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo, Equipped to Do More, Ecoldle and Vermeer Confidence Plus are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. Origin is a trademark of Origin Engines, Inc. © 2026 Vermeer Corporation. All rights reserved. Printed in the U.S.A. Please recycle.

