


# HG6000 HORIZONTAL GRINDER



**OPTIMAL CUTTING PERFORMANCE.** The new Series III duplex drum is built off the proven cutting performance of previous Vermeer duplex drum designs, and makes maintenance more convenient with enhancements such as an independently secured wedge system and enhanced drum balancing.

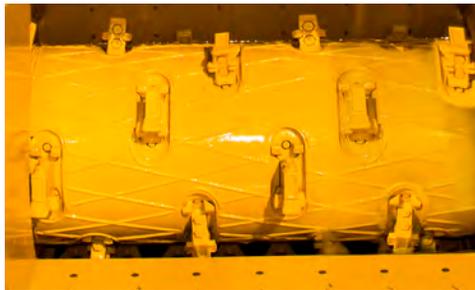

**CHIP PRODUCTION.** The optional chip drum produces a consistently chipped end product, rather than traditional shredded material, for uses such as biofuel.



**PROGRESSIVE PROCESSING.** The patented SmartFeed system monitors engine rpm and adjusts grinding speed to increase productivity. The open-ended, wide infeed table makes material loading easy and efficient.



**ENHANCED INFEED.** The feedroller planetary is fully enclosed for protection from debris and offers a tighter clearance between the feedroller and mill housing, helping reduce material blockage and drag on the feedroller circuit.



**JOBSITE SAFETY.** The thrown object deflector (TOD) reduces the amount and distance of thrown material debris, while also reducing interference when loading over-length material.



**ENGINE POWER.** The HG6000 offers engine options to meet the demands of your operation as well as those set by governmental regulations.

# HG6000 HORIZONTAL GRINDER

## GENERAL DIMENSIONS

Max transport length: 38.8' (11.8 m)

Max transport width: 8.2' (2.5 m)

Max transport height: 157.5" (400.1 cm)

Weight: 68,000 lb (30,844.3 kg)

## ENGINE OPTION ONE

Make and model: Caterpillar C18 Tier 4 Final (Stage IVB)

Max gross horsepower: 755 hp (563 kW)

Fuel tank capacity: 350 gal (1324.9 L)

## ENGINE OPTION TWO

Make and model: Caterpillar C18 Tier 4i (Stage IIIB)

Max gross horsepower: 755 hp (563 kW)

Fuel tank capacity: 350 gal (1324.9 L)

## ENGINE OPTION THREE

Make and model: Caterpillar C18 Tier 3

Max gross horsepower: 630 hp (470 kW)

Fuel tank capacity: 300 gal (1135.6 L)

## INFEED CONVEYOR

Feed table width: 60" (152.4 cm)

Feed table length: 20' (6.1 m)

## INFEED ROLLER

Max feed height: 32" (81.3 cm)

Infeed roller diameter: 36.1" (91.7 cm)

## DUPLEX DRUM

Millbox opening: 60" x 32" (152.4 cm x 81.3 cm)

Drum diameter: 28" (71.1 cm)

Number of hammers: 10

Number of tips: 20

## CHIP DRUM OPTION

Millbox opening: 60" (152.4 cm)

Drum diameter: 34.3" (87.1 cm)

Depth of cut: Ranging from .125" to 1.5" (3.2 mm to 38.1 mm)

Number of knives: 28

## DISCHARGE SYSTEM

Belt length: 81.3' (24.8 m)

Belt width: 48" (121.9 cm)

Belt design: 3-ply – 330# or straight warp single ply 330# both with V-cleat

## HYDRAULIC SYSTEM

Tank capacity: 100 gal (378.5 L)

Implement pump type: Variable displacement, axial piston

Discharge conveyor pump: Fixed displacement, gear pump

## CONTROLS

Stationary: Side-mounted LCD control station

Remote: Multifunction with built-in LCD display, max 300' (91.4 m) operating range

## OPTIONS

Vermeer Confidence Plus® asset protection program

## NOTES:

---

---

---

---

---

---

---

---

---

---

Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation. Equipment shown is for illustrative purposes only and may display optional accessories or components. Please contact your local Vermeer dealer for more information on machine specifications. Vermeer, the Vermeer logo, Equipped to Do More and Confidence Plus are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. © 2017 Vermeer Corporation. All Rights Reserved. Printed in the U.S.A. Please recycle.

