



BALE WRAPPERS




BW600 BALE WRAPPER

The BW600 bale wrapper provides fast wrapping times, operational control and airtight wrapping for optimized nutrient preservation.


1 Control each wrap with confidence thanks to a combination of features designed to help you make adjustments, monitor, count and place wrapped bales in a straight row.

2 Wrap efficiently with few stops along the way with three prestretchers. Evenly spaced coverage helps you maximize the time before a plastic film refill is needed compared to machines with only two prestretchers.

3 Pull the machine away from the line of bales with convenient access to the tongue. When hooking up to the machine, it can be raised and lowered without starting the machine.

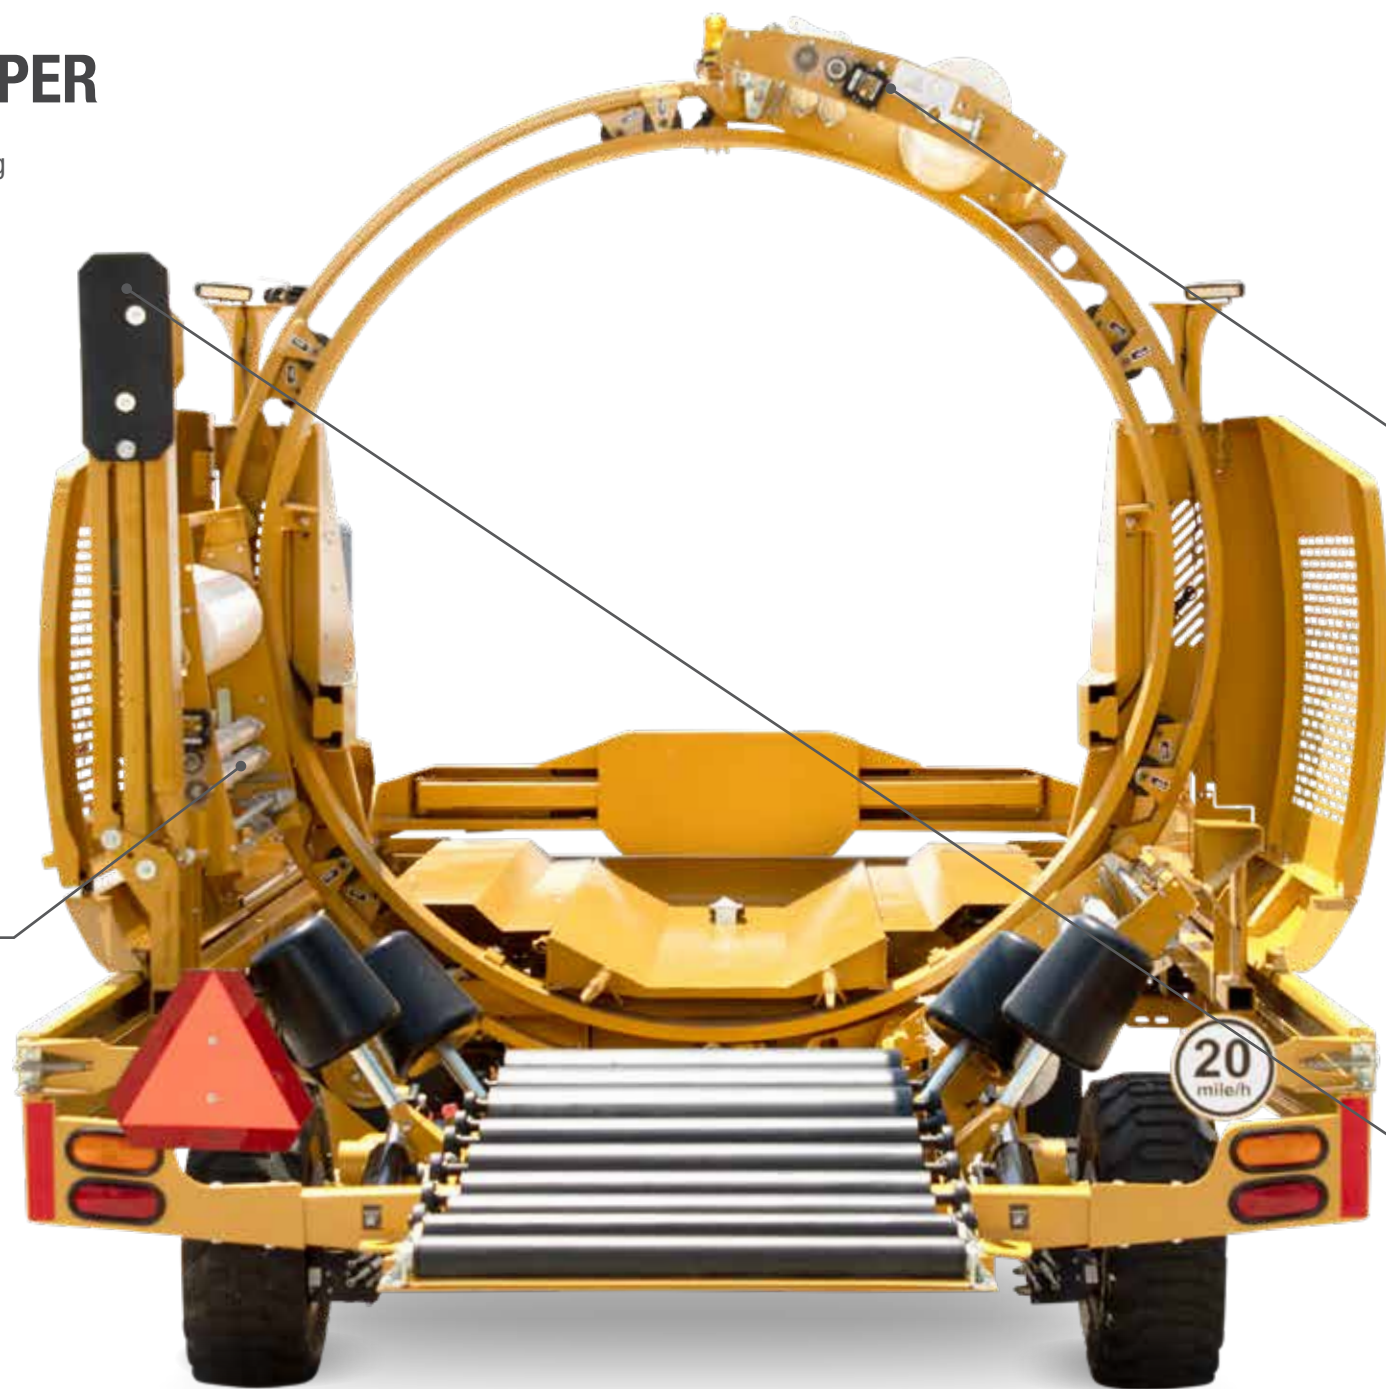

4 Have peace of mind knowing an optional film break sensor is constantly watching film so you don't have to. It senses the film once it's applying, makes sure bales are covered with the intended number of wraps and automatically shuts down the machine if the film breaks.

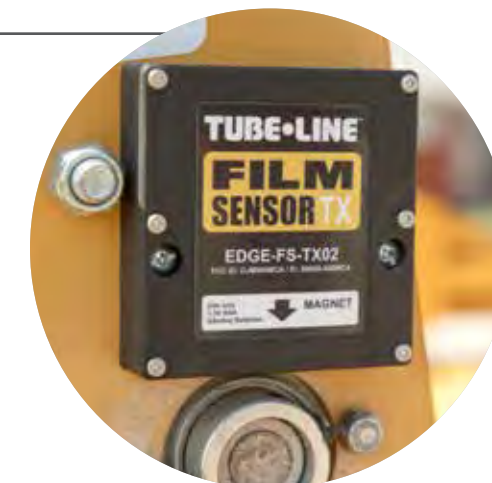

5 Optional spring-assisted final bale push off helps eject the bale from the wrapper to optimize bale appearance and help you quickly transition to the next row.

SPECIFICATION	BW600 INLINE BALE WRAPPER	SBW8500 SINGLE BALE WRAPPER
DIMENSIONS AND WEIGHTS		
Transport length	18 ft (5.5 m)	19 ft (5.8 m)
Transport width	9 ft (2.7 m)	7.4 ft (2.3 m)
Transport height	10 ft (3.5 m)	9 ft (2.7 m)
Machine weight	5,500 lb (2,495 kg)	4,600 lb (2,086.5 kg)
Tires	(2) 11L x 15-8 (2) 27 x 10.5 traction	380/55 x 17
SPECIFICATION		
Engine	Honda, 13 hp or 20 hp (9.7 kW or 14.9 kW)	NA
Engine start	Electric	NA
PTO horsepower recommended	NA	55 hp (41 kW)
Hydraulics	Self contained	1 single acting, return to tank
Hydraulic flow rate	11.5 gpm (43.5 L/min) for 13-hp (9.7-kW) engine 14 gpm (53 L/min) for 20-hp (15-kW) engine	6 gpm - 8 gpm (20 L/min - 30 L/min)
Control system	Digital with LCD display	Digital controller with 4.3-in (10.0-cm) color touchscreen and keypad
Hitch	Drawbar	Drawbar
Steering	Electric over hydraulic joystick	NA
Film stretcher	(3) 30 in (76.2 cm) x 55%	55% or 70%
Bale alignment	Fixed bale guides	NA
Wrapping capacity	120 bales per hour	NA
Hoop speed	Digital controller adjusted	NA
Bale size maximum (diameter x width)	6 ft x 5 ft (1.7 m x 1.5 m) round	5.2 ft x 5 ft (1.6 m x 1.5 m) round
FEATURES		
Remote steer, engine start/stop	Standard	NA
LED work lights	Optional	NA
Discharge guide rollers	Optional	NA
Plastic sensor alert	Optional	NA
Spring-assisted final bale push off	Optional	NA
Laser guidance	Optional	NA



Vermeer Corporation
1410 Vermeer Road East
Pella, Iowa 50219
800-370-3659 • vermeer.com

Vermeer Corporation reserves the right to make changes in engineering, design and specifications; add improvements; or discontinue manufacturing at any time without notice or obligation.

Equipment shown is for illustrative purposes only and may display optional accessories or components specific to their global region. Please contact your local Vermeer dealer for more information on machine specifications.

Vermeer and the Vermeer logo are trademarks of Vermeer Manufacturing Company in the U.S. and/or other countries. Honda is a trademark of Honda Motor Co., Ltd.

© 2024 Vermeer Corporation. All Rights Reserved.

LF 23-00928 08/23 SG (6K) / PN#510532498

BALE WRAPPERS