


VERIFIER G1 UTILITY LOCATOR



SIMPLICITY. No confusing menus or settings. Just turn it on and start locating.

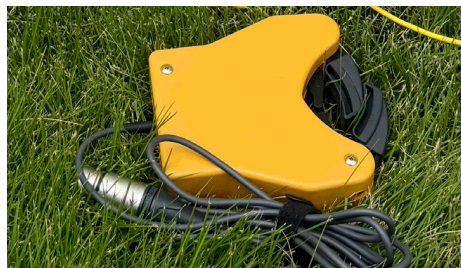

COIL CLAMP. Exclusive one-size-fits-all coil clamp does not need to encircle utility to induce signal. Clamp is 100% waterproof.



DURABILITY. 3-year service coverage including water damage that you come to know and expect from Vermeer Verifier series locators.



ACCURACY. Left and right antennas provide the same level of precision that you have come to know and trust with Vermeer Verifier's.



COMPACT. Adjust the frequency and power output on your transmitter from up to 500 ft (152 m) away.



VERSATILITY. Direct connect cables, patented coil clamp and induction modes allow you to tackle multiple jobsites with ease, keeping you on the job longer.

VERIFIER G1 UTILITY LOCATOR

VERMEER VERIFIER G1 LOCATOR. Weatherproof Receiver and Transmitter backed by a “No Water Damage” 3-year coverage.

RECEIVER (RX)

Active Frequency: 82.175 kHz \pm /-20 Hz

Battery type: Four alkaline LR6 AA

Battery life: 30 hours, 68°F (20°C)

Battery status: Continuous indication

Power save function: Automatic power off after 30 minutes of inactivity

Visual indication: LCD: bar graph, digital number and character

Depth display: High precision depth measurement

Range: 0 to 5 m / 16 ft

Depth readout unit: Feet & inches/meter

Depth accuracy: 6.5 ft (2 m): \pm 2.5%, 10 ft (3 m): \pm 5%,

Current value: Current value showing on the conductor is displayed for line identity in milliamps (mA)

Audio output: Internal speaker with volume

Interface: 6-pin output connector

Operating temperature: -4°F to 122°F (-20°C to 50°C)

Dimensions: 26 in x 5.98 in x 7.68 in (66 cm x 23 cm x 19.5 cm)

Weight: 2.4 lb (1.1 kg) including four batteries

Protection grade: IP54 (protection from splashed water)

TRANSMITTER (TX)

Output Frequency: 82.175 kHz \pm /-20 Hz

Output power: 1 watt maximum

Operating mode: Direct connection mode, inductive mode and external coil clamp mode

Battery type: Six alkaline LR20 D

Battery life: Direct mode: 50 hours — output 4 mA, 68°F (20°C), Inductive mode: 20 hours — output 50%, 68°F (20°C), Full power (1 W): 2 hours, 68°F (20°C)

Battery status: Low battery indication and press key readout

Audio indication: Internal speaker: alarm and beeping sounds

Measuring function: Output current: 0 mA - 300 mA, line voltage: 0 V to 250 V

Output protection: AC 250 V

Operating temperature: 4°F - 122°F (-20°C - 50°C)

Protection grade: IP54 (protection from splashed water)

Weight: 5.8 lb (2 kg) including six batteries

Dimensions: 9.61 in x 8.66 in x 3.62 in (24.4 cm x 22 cm x 9.2 cm),

When in storage: 8.9 in x 12.4 in x 4.3 in (23 cm x 31.5 cm x 11 cm)